




XM-350 XPERIENCE CONTROLLER

XM range

The Nexmosphere XM range offers Xperience controllers in a configurable and extendable form factor making it ideal to use when functionality combinations that aren't available in the smaller ranges are required. This series consists of XM controllers and EM extension units, which are mounted together at our production facilities in order to offer you just the right functionality set for your project.

XM controllers

The Modular controllers are fitted with 1 X-talk channel on the unit itself and can support up to 5 Extension Modules and 8 Shop Modules. The Controllers are equipped with a USB or RS232 interface to integrate the sensor Elements with your connected device via our API.

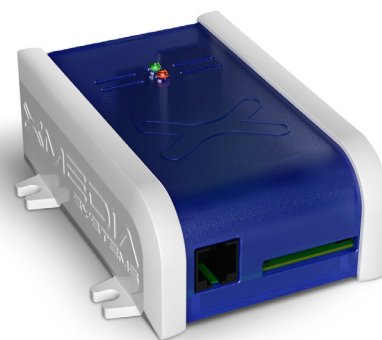

Features

- X-talk interface for easy sensor connection
- EM interface for system expansion
- ShopBus interface for large systems and interspacing
- Bootloadable via SD Card

X-talk interface

Connect a wide range of sensors, buttons, LEDs, or any other Nexmosphere Element to create your unique shopper experience. Due to auto-configuration, no additional setup is required for seamless operation.

- Plug and smile interface
- Compatible with any of the Nexmosphere Elements
- Providing power to the connected Elements for easy system wiring

EM expansion

The EM modules define the exact specification of the complete XM Xperience controller. Combine any of the modules into one system to make it fit the exact application needs. Different functionalities such as LED control, audio switching or large numbers of Element connections through X-talk channels can all be combined on a single XM controller. The EM modules are pre-assembled onto the XM controllers at our production facilities.

- Compatible with any of the EM- modules
- Connect up to 5 EM-modules to one XM-controller
- Pre-assembled factory build for your application

Shopbus

Shopbus Modules are specifically designed for two reasons; firstly, creating large systems, and secondly; allowing large interspacing between several control units, when Elements are needed far apart from each other. The Shopbus architecture enables connecting multiple XM-like controller units, with the possibility of using long cable lengths between the units.

RS232 interface

The industry-standard RS232 interface allows 3rd party product interfacing and can be controlled with X-script commands by any media player or content management system.

- Reliable high-speed RS232 communication
- Easy interfacing with 3rd party products
- No special drivers needed

X-Script API

The X-Script API runs on the controller by default. All connected Elements and system behavior can be controlled with our standardized API commands.

Benefits

- Auto start-up and configuration for highly reliable applications (24/7 operability)
- Modular architecture enables application-specific functionality set
- Compatible with all Nexmosphere Elements

XM-350 XPERIENCE CONTROLLER

Thermal specifications

Operating temperature: +10°C...+40°C/ +50°F ... +104°F
Storage temperature: -20°C...+50°C/ -4°F ... +122°F
Cooling: Passive cooling (no moving parts)

Electrical specifications


Operating voltage: 5VDC
LPS power adapter*
Max. system current: 2.0A
Power consumption: 0.2A
Max. output per X-talk interface: 500mA @5VDC
Max. output on EM interface: 1.8A @ 5VDC
Max. output on ShopBus interface: 1.0A @ 5VDC

*No more than 2 power supplies may be connected to an assembled Xperience Controller (XM + EM modules)

Serial communication specifications

Baudrate: 115200
Data bits: 8
Parity: None
Stop bits: 1
Flow control: None
Protocol: ASCII
EOL: CR+LF

Standards and Certifications



Miscellaneous

- Robust housing with screw brackets for secure fixing
- Built-in magnets for easy mounting on metal surfaces
- Both horizontal and vertical mounting allowed
- Diagnostic LED indicating potential issues
- Status LED indicating power and input/output operations
- 1-year warranty (optional 3-year extended warranty available)

Packaging


Netto Weight: 105g
Items per carton 1 or 10 pcs

Ordering information

Product ID	Description
XM-350	Xperience controller, 1x X-talk, Shopbus, RS232


Mechanical dimensions

LxWxH: 94 x 76 x 36 mm
Screw fixation: 54 x 69,7 mm

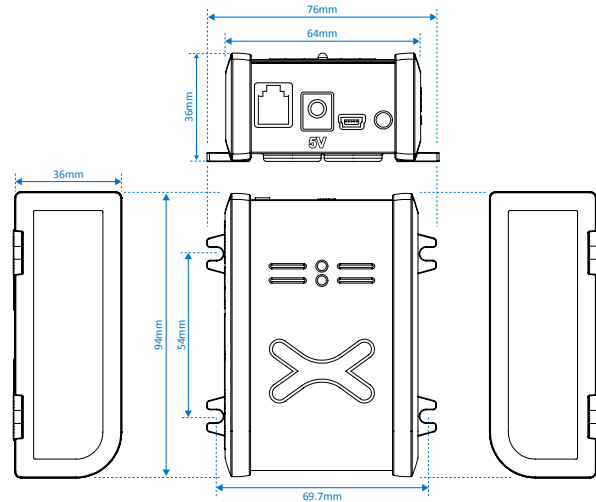

Hardware interfaces

1. Not in use
2. X-talk interface 001
3. 5V Power input 2.5mm DC socket
4. ShopBus RJ25 socket
5. RS232 RJ9 socket - API interface
6. SD card slot for bootloading

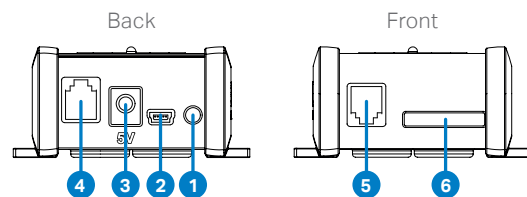

Quantity

1 pc

Nexmosphere

High Tech Campus 10 (M μ building)
5656 AE Eindhoven • The Netherlands

T +31 40 240 7070
E sales@nexmosphere.com

© 2017-2020 Nexmosphere. All rights reserved. v2.0 / 02-20
All content contained herein is subject to change without prior notice.