






The cerasonar subwoofers are the natural complement of our speakers. The cerasonar 10040 sub are the ideal choice for bass demanding applications like home cinema. They have an integrated backbox to ensure consistent quality in every installation situation. To be screwed directly on the studs, through the pre-drilled holes in every side, replacing the standard drywall panels and can be plastered up to 2 mm.






## **CAD** details

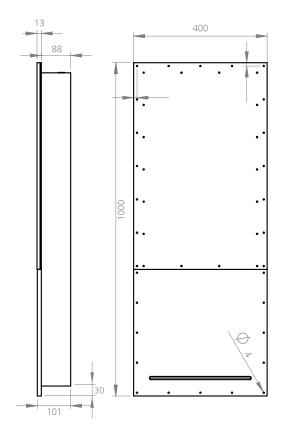

## **Technical specification**

Power rating	150 w RMS / 300 w max
Impedance	4 ohms
Frequency range	35 – 150 hz
Dispersion range	hemispherical
max SPL	108 db
Dimensions	100 x 40 x 10,1 cm / vent: 10 x 304 mm
Installation cut out	95,5 x 34,5 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Features	WAGO connector
Weight	10 kg

## Installation Video:





## Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.