


cerasonar 2525 fit

The cerasonar fit series is packaged in a very small form factor, allowing the installation in limited space; its entry level price point makes it particularly indicated for large volumes projects. The installation is extremely straightforward: it is required to make a cutout in the drywall panel, screw the speaker and plaster it over up to 2 mm.

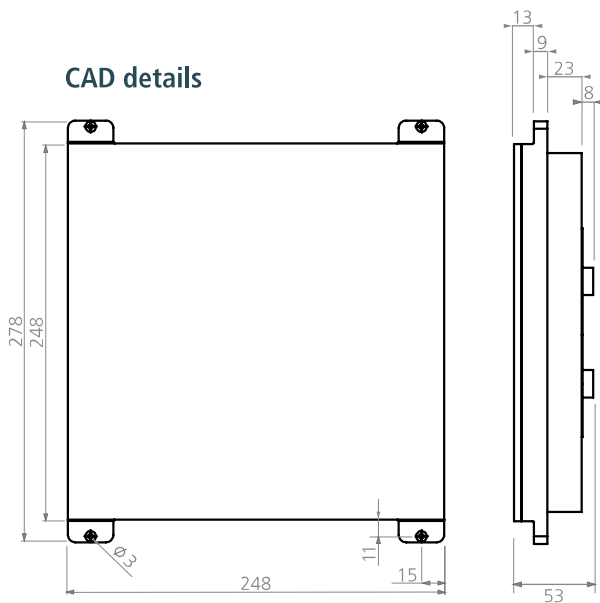

Technical specification

Power rating	50 w RMS / 100 W max
Impedance	4 ohms
Driver	RMS / 2 exciters
Frequency range	100 - 18.000 hz*
Dispersion range	180° x 180° h.v.
max SPL	100 db
Dimensions	15 x 22,5 x 5,3 cm
Installation cut out	24,8 x 24,8 cm
Installation type	1-layer 12,5 mm plasterboard only
Features	for humid environments, single-stereo mode (1/2power)
Substructure profile spacing	min 30 cm, installation in the middle of the plasterboard to improve the bass response
Weight	0,6 kg



Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.

Accessories

cerasonar template

The addition of a cerasonar template helps you to install the system even quicker. We recommend this for projects with larger quantities.

Dimensions

Size	TBD
------	-----

