




Accessories

cerasonar protection unit pro 25 w / 50 w / 100 w

This protection unit serves as an extended overload protection that also reacts to fast impulses. The pro version is suitable for the reference series. For single stereo mode two units are needed. We grant a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.

Dimensions

Size	20,0 x 9,1 x 4,9 cm
Jumper settings for protection	25 w (F1 and F4) - 50/100 w (F3 and F6)

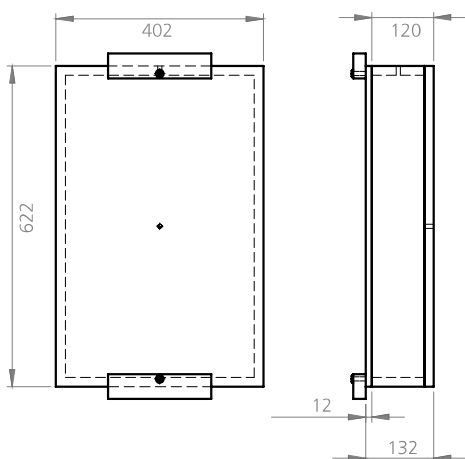


cerasonar frame 4062

These frames allow the installation of our invisible loudspeakers into solid wall or ceiling constructions. The frame of plywood is installed into a created niche. The installation material includes the insulating material as a part of the delivered package. Can be used for in situ concrete construction as well.

Dimensions

Size	40,2 x 62,2 x 12 cm
Installation cut out	42,0 x 64,0 x 14 cm
Weight	2,5 kg

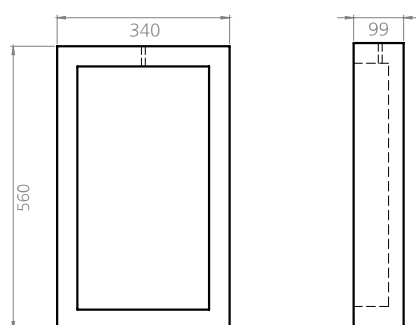


cerasonar backbox 4062

The backbox, which is mounted on the back of the respective cerasonar panel, serves to reduce noise emissions in neighbouring rooms. The rear sound is decelerated by a sophisticated damping system and compression effects reduced. It is screwed to the back of the speaker panel.

Dimensions

Size	34,0 x 56,0 x 9,9 cm
Delivery includes	template and screws

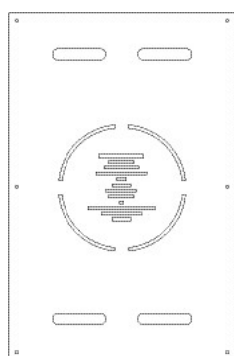

cerasonar placeholder 4062

The cerasonar placeholder is ideal for new buildings where the position of the loudspeaker should already be indicated before installation. The placeholders are slightly larger, so that the installation of the loudspeakers works smoothly.

Dimensions

Size	40,2 x 62,2 x 0,6 cm
------	----------------------