




cerasonar 6062 sub

The cerasonar 6062 sub can be easily installed in ceiling and walls, and is conceived to provide an extra bass kick for every invisible multiroom music projects. To be screwed directly on the studs, through the predrilled holes in every side, replacing the standard.



CAD details

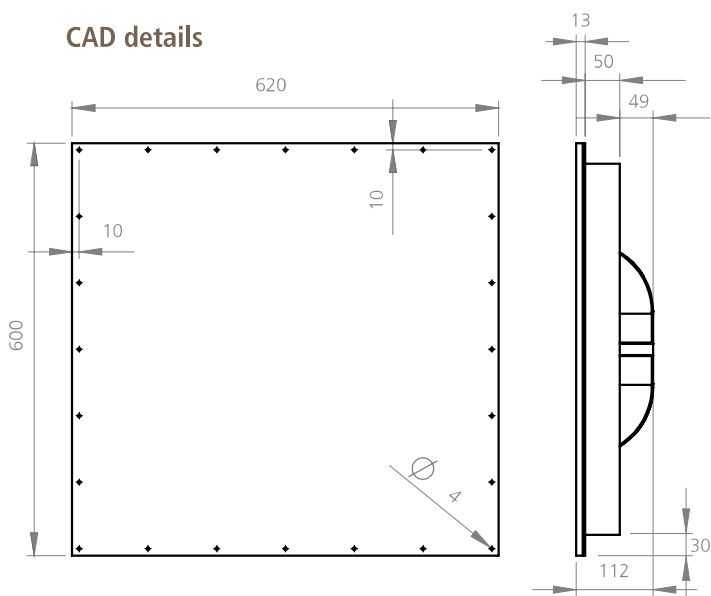

Technical specification

Power rating	120 w RMS / 240 w max
Impedance	4 ohms
Frequency range	30 – 150 hz
Dispersion range	hemispherical
max SPL	107 db
Dimensions	60 x 62 x 11,2 cm
Installation cut out	54,5 x 56,5 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Weight	7 kg

* depending on the installation situation. We recommend min. 100 litres installation volume!

Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.

