




## cerasonar 9062 ultimate

The cerasonar ultimate is a fullrange panel, it includes a 12" bass driver. It can be connected to any standard amplifier without the need of a protection unit or additional sub. The cerasonar ultimate series panels are designed to be screwed directly on the studs, through the pre-drilled holes in every side, replacing the standard drywall panels and can be plastered up to 2 mm.



### CAD details

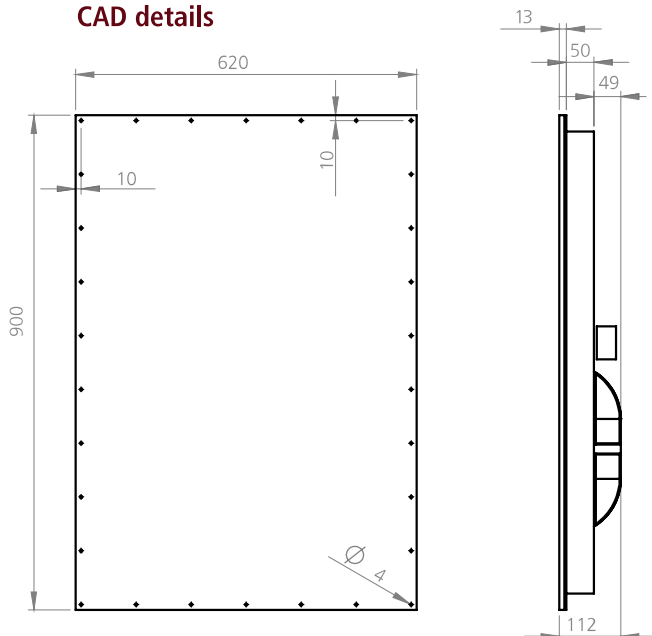

### Technical specification

Power rating	100 w RMS / 200 w max
Impedance	4 ohms
Frequency range	1 bass driver, 2 exciters
Dispersion range	30 - 18.000 hz*
max SPL	180° x 180°
Dimensions	105 db
Installation cut out	84,5 x 56,5 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Features	protection inbuilt
Weight	9,5 kg

\* depending on the installation situation. We recommend min. 100 litres installation volume!



### Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



### Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.

## Accessories

### cerasonar cs-500dsp4

Amplifiers are an important foundation of any audio system. Our cs-500dsp4 comes with predefined presets for the respective cerasonar speakers, which can be configured with any modern web browser. Our amplifier model becomes the ideal partner for multiroom audio projects, which can be controlled by the system pioneer control4, for example. The cs-500dsp4 has 4 amplifier channels with 125 watts each into 4 and 8 ohms (or 2x 250 watts bridged). The amplifier can also be operated in 70V/100V mode. Up to 2 units fit in 1U (19"). The adapter plates for 19" installation as well as input adapter Phoenix to RCA are included.



### Dimensions

Size 245 x 215 x 45 / (50mm including bumper)