



# PROFESSIONAL PENDANT SPEAKERS

## PRICE & PERFORMANCE

By far the boldest loudspeaker available at its price point, our Professional Collection Pendants provide superior bass and dispersion in an ultra-modern enclosure. The secret is our rear-facing tuned bass radiator that virtually doubles the cabinet size when it comes to low-end reproduction. We have the same premium transformers and Silk DPSD™ tweeters as the rest of our Professional collection, ensuring a smooth, consistent sonic signature for all of your installs, regardless of style or placement. They come standard in black and white with three woofer/ tweeter compliments and one subwoofer.

## PRODUCT ID



PPSUB8




PP80



PP60



PP50

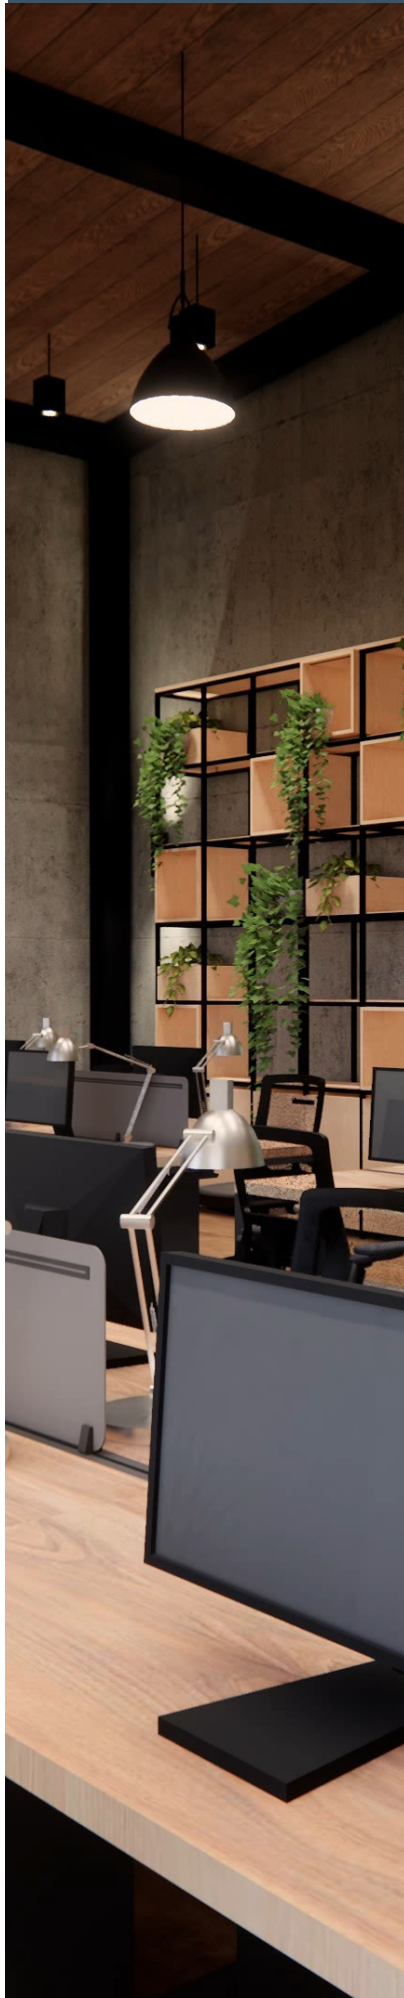

# PROFESSIONAL PENDANT SPEAKERS






SPECIFICATIONS	PPSUB8	PP80	PP60
Part	SPPSUB80B, SPPSUB80W	SPP80000B, SPP80000W	SPP60000B, SPP60000W
Woofers	8" Polypropylene	8" Polypropylene	6½" Polypropylene
Tweeter	-	1" Silk DSPD™ MMP™	1" Silk DSPD™ MMP™
Power Handling (Program Power)	200 Watts	200 Watts	130 Watts
Power Handling (Cont. Pink Noise)	125 Watts	100 Watts	65 Watts
Frequency Response	(- 10dB): 40Hz-250Hz (- 3dB): 55Hz-250Hz	(- 10dB): 42Hz-20kHz (- 3dB): 57Hz-20kHz	(- 10dB): 50Hz-20kHz (- 3dB): 62Hz-20kHz
Nominal Coverage Angle	180 Degree Conical Coverage	110 Degree Conical Coverage	120 Degree Conical Coverage
Sensitivity @1m	90dB	90dB	88dB
Rated Maximum SPL	110dB	110dB	108dB
Impedance	8 ohm Nominal	8 ohm Nominal	8 ohm Nominal
Transformer Taps	70V - 120W, 60W, 30W, 15W 100V - 120W, 60W, 30W	70V - 60W, 30W, 15W, 7.5W 100V - 60W, 30W, 15W	70V - 60W, 30W, 15W, 7.5W 100V - 60W, 30W, 15W
Diameter	10" (254mm)	10" (254mm)	8 ¼" (210mm)
Length	16 ¼" (412mm)	16 ¼" (412mm)	12 ⅝" (313mm)
Feature	8" Passive Radiator	8" Passive Radiator	6 ½" Passive Radiator
Colors	Black, White	Black, White	Black, White

SPECIFICATIONS	PP50
Part	SPP50000B, SPP50000W
Woofers	5 ¼" Polypropylene
Tweeter	1" Silk DSPD™ MMP™
Power Handling (Program Power)	100 Watts
Power Handling (Cont. Pink Noise)	50 Watts
Frequency Response	(- 10dB): 57Hz-20kHz (- 3dB): 75Hz-20kHz
Nominal Coverage Angle	120 Degree Conical Coverage
Sensitivity @1m	87dB
Rated Maximum SPL	105dB
Impedance	8 ohm Nominal
Transformer Taps	70V - 30W, 15W, 7.5W, 3.75W 100V - 30W, 15W, 7.5W
Diameter	6 1/16" (170mm)
Length	10 ½" (267mm)
Feature	5" Passive Radiator
Colors	Black, White




# PROFESSIONAL PENDANT SPEAKERS



## LINE DRAWINGS

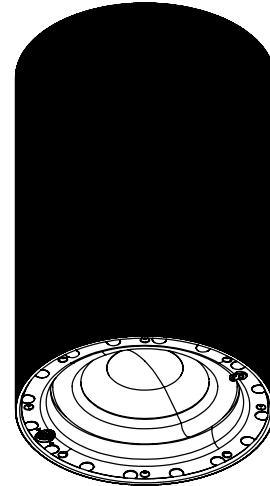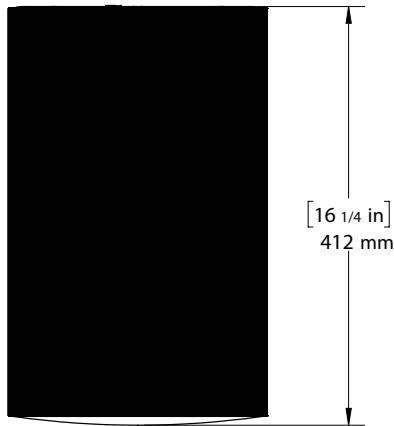

PPSUB8

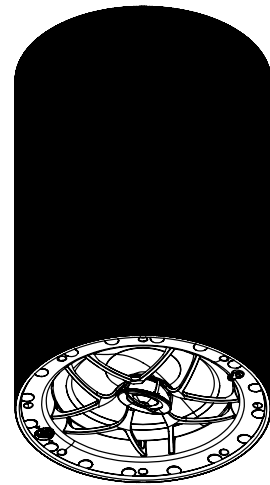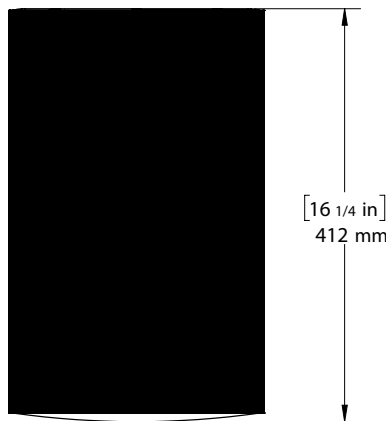




PP80

Please see [originacoustics.com](http://originacoustics.com) for the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.



# PROFESSIONAL PENDANT SPEAKERS



## LINE DRAWINGS

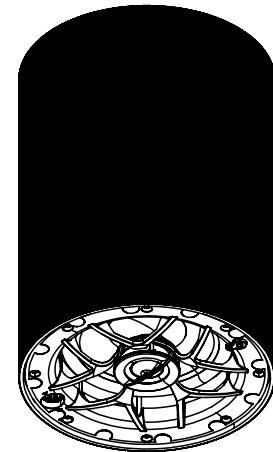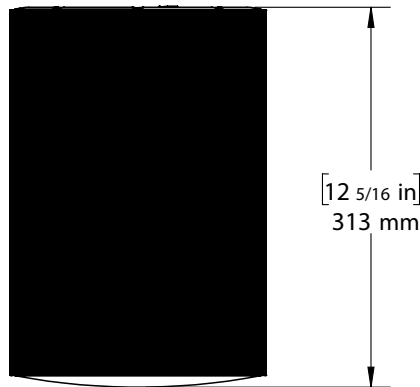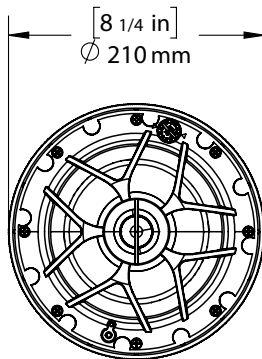

PP60

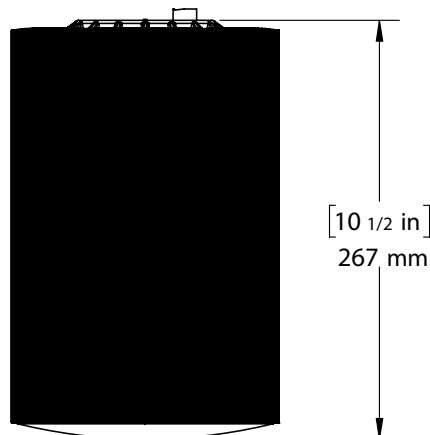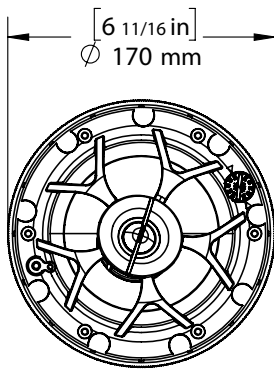

PP50

Please see [originacoustics.com](http://originacoustics.com) for the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.