



newline


All Stars

ELARA è l'ottavo satellite più grande di Giove. Con una dimensione pari solo al 2% dell'Europa, è il più piccolo dei quattro satelliti galileiani.



LA PIÙ POTENTE SOLUZIONE **ALL-IN-ONE**

Questo display interattivo di fascia alta porta ogni esperienza che tu possa desiderare nel tuo ambiente di lavoro. Il suono potente e di alta qualità, l'esperienza interattiva, tocco e di scrittura superiori grazie all'optical bonding, la videocamera modulare e i microfoni integrati, rendono ELARA una vera soluzione ibrida. L'angolo di visione molto ampio garantisce a tutti i presenti nella sala riunioni di beneficiare delle immagini 4K cristalline e colori vivaci.

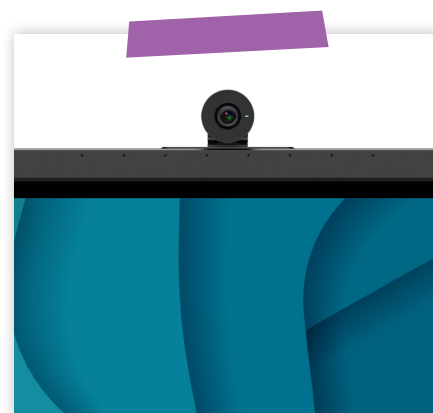

ECOSISTEMA INTERATTIVO NEWLINE

L'ecosistema interattivo completamente rinnovato è pieno di software che ti aiutano a utilizzare al massimo il tuo display interattivo. Che si tratti di configurare la tua videoconferenza in modo super veloce, utilizzare la mappatura concettuale per fare brainstorming, collegare il tuo dispositivo, condividere lo schermo o trasmettere!

WHITEBOARD CAST BROADCAST ENGAGE APP STORE REACTIV SUITE
CLASSROOM TOOLS LAUNCH CONTROL DISPLAY MANAGEMENT



Wifi e Bluetooth potenziati



USB di tipo C alimentazione 100W



Profili Multiutente con Protezione



Ampia Compatibilità



Sistema Audio di alta qualità incluso Subwoofer



SDM-S Ready

65"

75"

86"

MODEL

| | |
|-----------|----------|
| Elara 65" | TT-6522Q |
| Elara 75" | TT-7522Q |
| Elara 86" | TT-8622Q |

DISPLAY

| | |
|-------------------|--|
| Backlight | Direct LED (Wide color gamut + Anti blue light) |
| Display Area | 65" 4K: 1428 x 804 mm 75" 4K: 1650 x 928 mm 86" 4K: 1895 x 1066 mm |
| Display Ratio | 16:9 |
| Resolution | 3840 x 2160 (4K) |
| Colors | 1,07 Billion |
| Brightness | 400 cd/m ² |
| Contrast Ratio | 5000:1 |
| Response Time | 6 ms |
| Viewing Angle | H = 178, V = 178 typ. |
| Display Life Time | ≥50000 hours |

POWER CONSUMPTION

| | |
|----------------------------------|---|
| Power Consumption (Eco mode) | 65" 4K: 133 W 75" 4K: 150 W 86" 4K: 168 W |
| Power Consumption (Standby mode) | <0,5 W |

TOUCH TECHNOLOGY

| | |
|----------------------------|--|
| Touch Solution | IR |
| Glass Surface Technology | Anti-Glare+Anti-Fingerprint, + Antimicrobial Tempered Glass |
| Transparency | 88%±3 |
| Haze | 2 %~5% |
| Touch Surface Hardness | 7H |
| Touch Points | 32 Windows & 20 Android |
| Gap between Glass and OC | Certified Optical Bonding |
| Touch Screen Writing Tools | Stylus, Finger, Palm |
| Number of stylus | 2 |
| Accuracy | ±1 mm |

SPEAKER

| | |
|--------------------------|--------------------------|
| Speaker Position | Frontward |
| Speaker Rated Impedance | 6 Ω |
| Speaker Freq.Response | 250 Hz-20 KHz SPL -10 dB |
| Output S.P.L. | 77±2 dB |
| Speaker Max.Power Output | 20 W x 2 |

SUBWOOFER

| | |
|--------------------------|-------------------------|
| Speaker Position | Rear side |
| Speaker Rated Impedance | 4 Ω |
| Speaker Freq.Response | 20 Hz-20 KHz SPL -10 dB |
| Output S.P.L. | 77±2 dB |
| Speaker Max.Power Output | 15 W x 1 |

MICROPHONE

| | |
|------------------|--|
| Mic Position | 8 Microphone Array Upper Front |
| Pick Up Distance | 8 m |
| Mic Performance | Echo cancellation, Beamforming, Noise Reduction |

FRONT I/O

| | |
|-----------------------|---|
| USB Type-C (PD 100 W) | 1 |
| HDMI IN 2.0 | 1 |
| USB Type-B (Touch) | 1 |
| USB 3.0 Type-A | 1 |
| Microphone In | 1 |

REAR I/O

| | |
|----------------------------------|-----------------|
| HDMI IN 2.0 | 2 |
| DisplayPort 1.2 | 1 |
| USB Type-B (Touch) | 3 |
| USB 3.0 Type-C (no PD) | 1 |
| USB 3.0 Type-A | 2 |
| USB 3.0 Type-A to Android | 1 |
| HDMI OUT 2.0 | 1 |
| RS232 | 1 |
| RJ45 (Gigabit) | IN x 1 & OUT x1 |
| OPS Slot | 1 |
| SPDIF | 1 |
| Audio Line Out | 1 |
| WIFI Module Slot | 1 |
| SDM-S Slot | 1 |
| Power Delivery Connection (180W) | 1 |

SMART SYSTEM

| | |
|---|---|
| SoC Chipset | Amlogic A311D2 octa-core processor 4 x Cortex-A73 at 2,2Ghz, 4 x Cortex x-A53 at 2,0Ghz |
| RAM | 8 GB DR4 |
| Storage | 128 GB |
| Android Version | Android 11 |
| Multimedia File Formats Support For Image | JPEG, BMP, PNG |
| Multimedia File Formats Support For Video | MPEG1, MPEG2, MPEG4, SorensonH.263,H.263,H.264, HEVC/H.265,MVC,AVS,A VS+,WMV3,VC1,Motion JPEG,VP8,VP9,RV30/RV40 |
| Multimedia File Formats Support For Audio | MPEG1/2 @LAYER1; @LAYER2; @LAYER3, EAC3, ACC-LC, HEAAC,VORBIS,LPCM, IMA-ADPCM,MS-ADPCM,G711 A/MU-LAW,LBR(COOK),FLAC |
| Proximity Sensor | 2 |
| Camera Slot | Included |
| Wi-Fi 6 | Included |
| Bluetooth 5.0 | Included |

CAMERA MODULE

| | |
|-------------------|--------------------|
| Camera Resolution | 4K@ 30 Hz /UHD |
| Field of View | 120° FOV Lenses |
| IR Camera | 352 x 352 / 15 fps |
| Camera Tile Range | 15° |

TRANSPORTATION / STORAGE

| | |
|--|--|
| Outline Dimension (without wall mount bracket) | 65" 4K: 1509 x 865 x 86 mm 75" 4K: 1731 x 1010 x 86 mm 86" 4K: 1977 x 1150 x 86 mm |
| Net Weight | 65" 4K: 36 Kg 75" 4K: 49 Kg 86" 4K: 60 Kg |
| VESA | 65" 4K: 600 x 400 mm 75" 4K: 800 x 400 mm 86" 4K: 800 x 400 mm |