

newline


All Stars

ELARA è l'ottavo satellite più grande di Giove. Con una dimensione pari solo al 2% dell'Europa, è il più piccolo dei quattro satelliti galileiani.



LA SOLUZIONE **IBRIDA** PIÙ VERSATILE

Questo display interattivo di fascia alta porta ogni esperienza che tu possa desiderare nel tuo ambiente di lavoro. Il suono potente e di alta qualità, l'esperienza interattiva, tocco e di scrittura superiori grazie all'optical bonding, la videocamera modulare e i microfoni integrati, rendono ELARA una vera soluzione ibrida. L'angolo di visione molto ampio garantisce a tutti i presenti nella sala riunioni di beneficiare delle immagini 4K cristalline e colori vivaci.

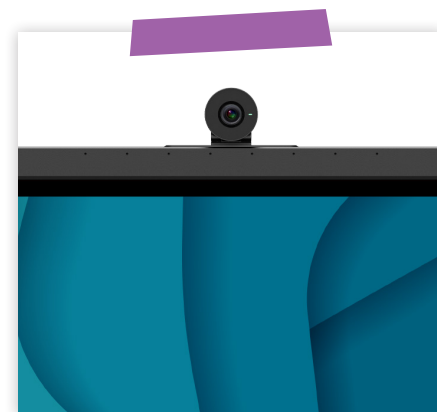

ECOSISTEMA INTERATTIVO NEWLINE

L'ecosistema interattivo completamente rinnovato è pieno di software che ti aiutano a utilizzare al massimo il tuo display interattivo. Che si tratti di configurare la tua videoconferenza in modo super veloce, utilizzare la mappatura concettuale per fare brainstorming, collegare il tuo dispositivo, condividere lo schermo o trasmettere!

WHITEBOARD CAST BROADCAST ENGAGE APP STORE REACTIV SUITE
CLASSROOM TOOLS LAUNCH CONTROL DISPLAY MANAGEMENT

WiFi 6
CERTIFIED

Wifi e Bluetooth
potenziati



USB di tipo C
alimentazione
100W



Profili Multiutente
con Protezione



NFC
Easy Login



Sistema Audio di
alta qualità
incluso Subwoofer



SDM-S
Ready

65"

75"

86"

MODEL

Elara 65"	TT-6522Q
Elara 75"	TT-7522Q
Elara 86"	TT-8622Q

PANEL

Backlight	Direct LED (Wide color gamut + Anti blue light)
Glass Surface	Anti-Glare+Anti-Fingerprint, + Antimicrobial Tempered Glass
Bonding Technology	Certified Optical Bonding
Display Area	65": 1428 x 803 mm 75": 1650 x 928 mm 86": 1895 x 1066 mm
Display Ratio	16:09
Resolution	3840 x 2160 (4K)
Colours	1,07 Billion
Brightness	400 cd/m ²
Contrast Ratio	5000:1
Response Time	6 ms
Viewing Angle	178°
Display Life Time	≥50000 hours
Transparency	>88%
Haze	2 %~5%
Touch Surface Hardness	7H

POWER CONSUMPTION

Standard mode	65": 133 W 75": 150 W 86": 168 W
Standby Mode	<0,5 W

TOUCH

Touch Technology	Stellar Touch Technology
Touch Points	40 Windows / 20 Android
Touch Screen Writing Tools	Passive pen, Finger, Fist
Number of stylus	2
Accuracy	±1 mm

SPEAKER

Speaker Position	Front Facing
Speaker Rated Impedance	6 Ω
Speaker Freq.Response	250 Hz-20 KHz SPL -10 dB
Output S.P.L.	80±3 dB
Speaker Max.Power Output	20 W x 2

SUBWOOFER

Speaker Position	Rear side
Speaker Rated Impedance	4 Ω
Speaker Freq.Response	20 Hz-20 KHz SPL -10 dB
Output S.P.L.	77±2 dB
Speaker Max.Power Output	15 W x 1

MICROPHONE

Mic Position	8 Microphone Array Upper Front
Pick Up Distance	8 m
Mic Performance	Echo cancellation, Beamforming, Noise Reduction

CAMERA MODULE

Camera Resolution	4K
Field of View	120° FOV Lenses
Camera Tile Range	15°

FRONT I/O

USB Type-C (Powered 100 W)	1
HDMI IN 2.0	1
USB Type-B (Touch)	1
USB 3.0 Type-A	1
Microphone In	1

REAR I/O

HDMI IN 2.0	2
DisplayPort 1.2	1
USB Type-B (Touch)	3
USB 3.0 Type-C (Powered 15W)	1
USB 3.0 Type-A	2
USB 3.0 Type-A to Android	1
HDMI OUT 2.0	1
RS232	1
RJ45 (Gigabit)	In x 1 / Out x 1
OPS Slot	1
SPDIF	1
Audio Line Out	1
WIFI Module Slot	1
SDM-S Slot	1
Power Out Connect (180 W)	1
NFC	1

SMART SYSTEM

SoC Chipset	Amlogic A311D2 octa-core processor 4 x Cortex-A73 at 2,2 Ghz, 4 x Cortex-A53 at 2,0 Ghz
RAM	8 GB (DDR4)
Storage	128 GB
Operating System	Android 11
Formats Support For Image	JPEG, BMP, PNG
Formats Support For Video	MPEG1, MPEG2, MPEG4, H.263, H.263+, H.264, MVC, AVS, AVS+, WMV3, VC1, Motion JPEG, VP8, VP9, RV30/RV40 MPEG1/2 @LAYER1; @LAYER2; @LAYER3, EAC3, ACC-LC, HEAAC, VORBIS, LPCM, IMA-ADPCM, MS-ADPCM, G711 A/MU-LAW, LBR(COOK), FLAC
Formats Support For Audio	
Proximity Sensor	2
Camera	1
Wi-Fi 6 + Bluetooth 5.2 Module	Integrated (Replaceable)

EXTRA FIRMWARE FEATURES

Lan control	✓
Wake on Lan	✓
CEC	✓
Multuser profile / User Profiles: 6	1 Admin + 5 Users
Setting Menu Admin Mode	✓

TRANSPORTATION / STORAGE

Outline Dimensions (Excl. wall mount)	65": 1513 x 926 x 116 mm 75": 1735 x 1050 x 116 mm 86": 1981 x 1190 x 116 mm
Net Weight	65": 39 Kg 75": 50 Kg 86": 65 Kg
VESA	65": 600 x 400 mm 75": 800 x 400 mm 86": 800 x 400 mm