

DS-VW775



**Mounting Pattern**  
200 x 200 up to  
600 x 400mm

**Max Load**  
125lb  
(56.8kg)



- Accommodates displays in landscape and portrait orientation
- Integrated cable management allow cables to move in and out with the display
- Modular mount for unlimited video wall display configurations
- Security hardware option deters tapping and theft
- Compatible up to VESA® 600 x 400mm

**SMARTMOUNT.**

# Supreme Full Service Video Wall Mount

FOR 46" TO 60" DISPLAYS

Peerless-AV's SmartMount® Supreme Full Service Video Wall Mount raises the bar of excellence with an enhanced feature set centered on ease of install and display alignment. With the addition of tool-less lateral micro-adjustment, the Supreme offers 1.5" of fine tune adjustment on each of the X, Y and Z axis. Serviceability is easier than ever before with single hand pop-out release features on the top and bottom of the mount. Reusable spacers can be used for both portrait and landscape applications, resulting in a faster install and lower cost. Enhanced cable management allows the cables to effortlessly travel in and out with the display, while the quick release accessory provides quick access in recessed applications without risking display damage or searching for hidden pull strings.

- NO TOOLS REQUIRED FOR MICRO-ADJUSTMENT**  
1.5" of travel on each x, y and z axis
- EASY HANG WALL PLATE**  
Compatible with the Peerless-AV® install app for a simplified install
- REUSABLE CUSTOM WALL SPACERS**  
Eliminate guesswork and on-site installation calculations
- CONVENIENT SERVICE POP-OUT**  
Quickly release the mount for service with a simple turn of the lever
- QUICK RELEASE ACCESSORY AVAILABLE**  
Releases a recessed display for service without pressing on the front of the display

VESA® 600 x 400mm Adaptor Included



VESA® 600 x 400mm Adaptor Included



Eliminate the guesswork during installation with the Peerless-AV® Video Wall Locator app.



Please visit [peerless-av.com/en-us/patents](http://peerless-av.com/en-us/patents) for patent information.

✉ [info@peerless-av.com](mailto:info@peerless-av.com)  
 🌐 [peerless-av.com](http://peerless-av.com)

**peerless-AV®**  
 Driving Technology Through Innovation

DS-VW775 SmartMount® Supreme Full Service Video Wall Mount for 46"-60" Displays

**Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DS-VW775	21.25" x 21.46" x 3.15" - 14.77" (540 x 545 x 80 - 375mm)	30.3lb (13.7kg)	125lb (56.8kg)	Powder Coat, Textured	Black


**Package Specifications**

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-VW775	30.38" x 23.63" x 4.50" (771 x 600 x 114mm)	36lb (16.3kg)	735029308669	Wall Mount, Adaptor Rails & Mounting Hardware	1

**Accessories**

- DS-VWRSxxx:** Reusable Display Dedicated Spacers
- ACC-QRL:** Quick Release Accessory - Landscape
- ACC-QRP:** Quick Release Accessory - Portrait
- ACC-DHK:** Display Handling Kit
- ACC-DHP6:** Display Handling Kit Replacement Pads - 6pk

All dimensions = inch (mm)

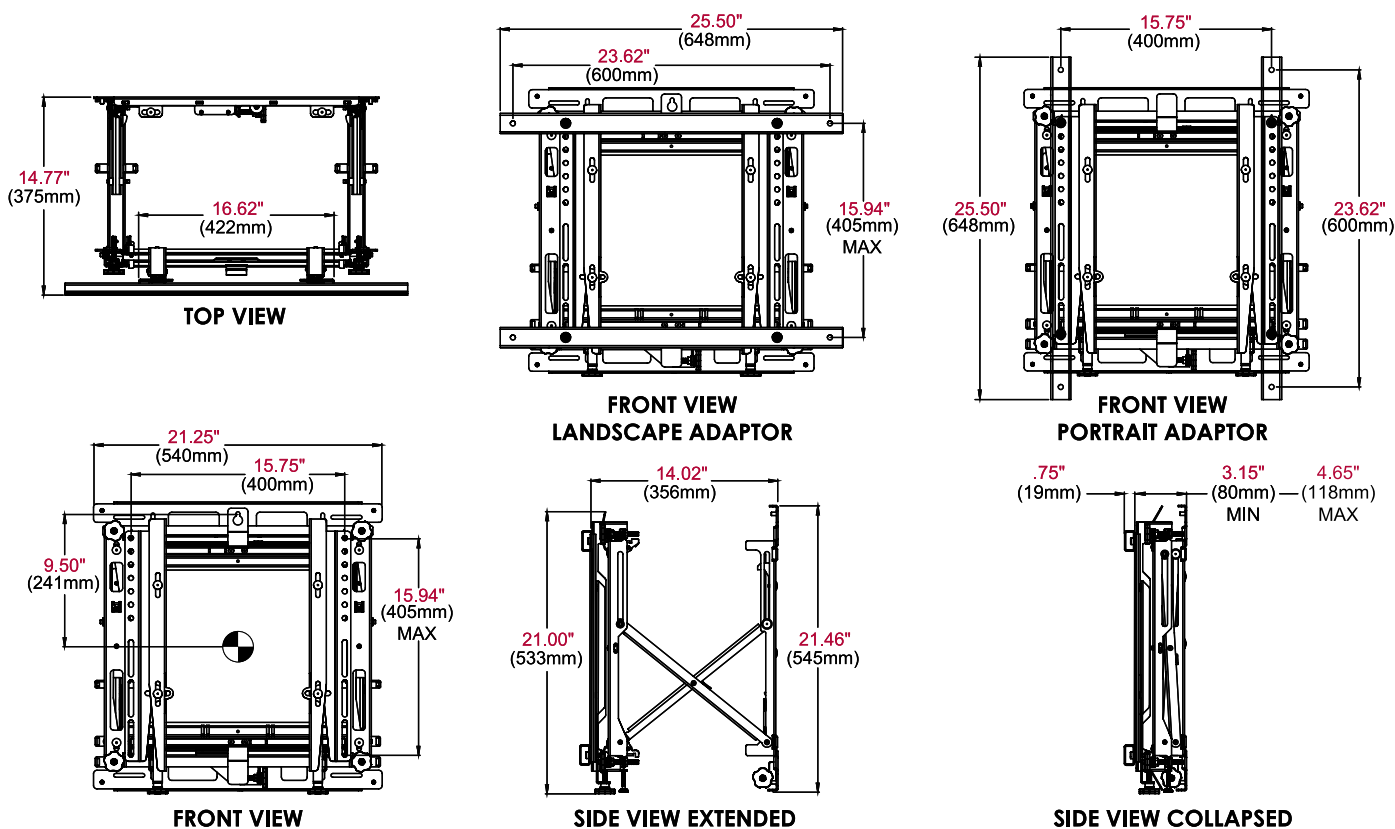

**Architect Specifications**

The SmartMount® Supreme Full Service Video Wall Mount shall be a Peerless-AV model DS-VW775 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit [peerless-av.com](http://peerless-av.com) to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

**Peerless-AV**  
 2300 White Oak Circle  
 Aurora, IL 60502 USA  
**(800) 865-2112**  
**(630) 375-5100**  
**Fax: (800) 359-6500**

**Peerless-AV EMEA**  
 Unit 3 Watford Interchange  
 Colonial Way, Watford  
 Herts, WD24 4WP  
 United Kingdom  
**+44 (0) 1923 200100**  
**Fax: +44 (0) 1923 200101**

**Peerless-AV Latin America**  
 Ave de las Industrias 413  
 Parque Industrial Escobedo  
 Escobedo, N.L.,  
 Mexico 66062  
**+52 (81) 8384-8300**  
**Fax: +52 (81) 8384-8360**

